



Moduflex⁺

PS 48VDC 4kW

PRODUCT DESCRIPTION

The Moduflex+ series is designed using Enetek's high efficiency switchmode rectifier modules and intelligent controller that incorporates with the respective load and battery distribution, incoming AC as well as surge protection. The solution can be customized according to the specific requirements.


The SMU01 controller with user-friendly design, coupled with its compact size, simple-to-operate interface is highly adaptable and provides the monitoring capabilities for managing and optimizing the system solution.

KEY FEATURES

- **Hot-Swap Rectifier Modules**
Rectifier modules are hot-swappable and hot-pluggable
- **Modular, Scalable Cabinet Design**
Flexible installations and capable of parallel cabinets for additional power/distribution
- **High Power Density**
Reduces footprint
- **Highly Efficient @ >96%**
Reduces losses and lowers operating costs
- **Front-to-back Airflow**
Unobstructed scalability of shelves
- **Excellent EMC Performance**
Lower interference and excellent susceptibility
- **Wide Input Voltage Range**
Continued operation in demanding grid conditions
- **Wide Temperature Range**
Applications in harsh climatic conditions
- **Compliant with Global Standards**



APPLICATIONS

- Macro cell BTS
- Microwave
- LTE / WiMax
- FTTX
- Broadband Access
- Optical Fibre Transmission System
- IDC (Internet Data Centres)

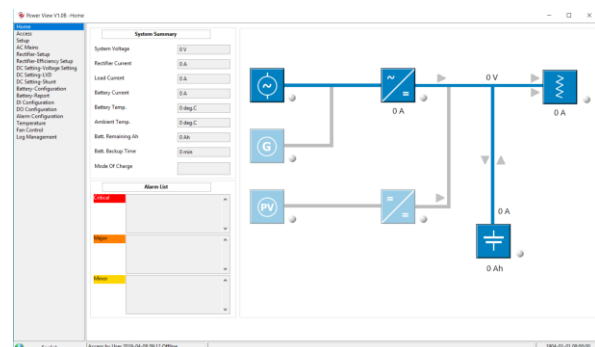

TECHNICAL SPECIFICATIONS

PART NUMBER		SPC30201.2xx
Model		MODUFLEX + PS 48VDC 4kW
Capacity Range		4kW
INPUT SPECIFICATIONS		
Mains Input Configuration		1-Phase 230Vac
Power Factor		≥ 0.99
Frequency		45Hz to 66Hz
THD		< 5% (50% to 100% load)
Input Protections		Soft Start
		Surge Protection
		Overvoltage Protection
OUTPUT SPECIFICATIONS		
Nominal Output Voltage		48.0Vdc
Output Power		4kW
Efficiency		>96%
BATTERY DISTRIBUTION		
Battery Low Voltage Disconnect		BLVD @ 100A
Battery Distribution		2 x 63A 1P MCB Front access
LOAD DISTRIBUTION		
Load Distribution		2x 63A 1P MCB Front access
CONTROLLER and RECTIFIER TYPE		
Rectifier Module		ETR ⁺ 2048 range of rectifier modules
Controller Module		SMU01 (refer to datasheet)
ENVIRONMENTAL		
Operating Temperature Range		-20°C to +75°C (de-rates above 55°C)
Storage Temperature Range		-40°C to +85°C
Relative Humidity		Operating: 5% to 95% RH non-condensing
		Storage: 0% to 99% RH non-condensing
Acoustic Noise		≤58dB @ full load, 40°C
PHYSICAL		
Dimensions WxDxH (mm)		482 x 383 x44 (1U)
Net Weight		~5kg (excluding rectifier modules)
DESIGN STANDARDS		
Electrical Safety		EN/IEC62368-1
EMC		ETSI EN 300 386 V2.1.1, EN61000-6-1/-2/-3/-4

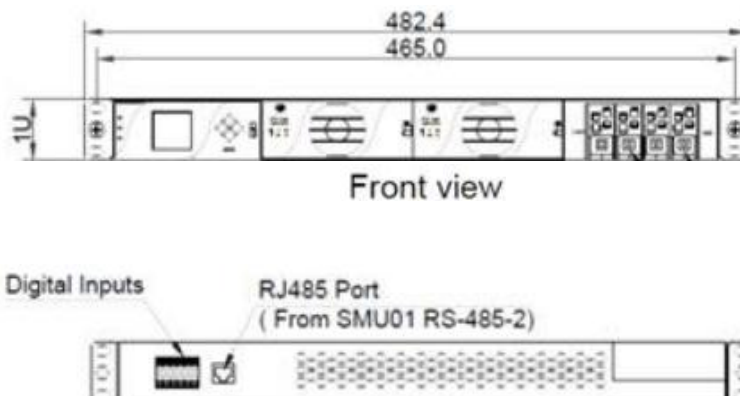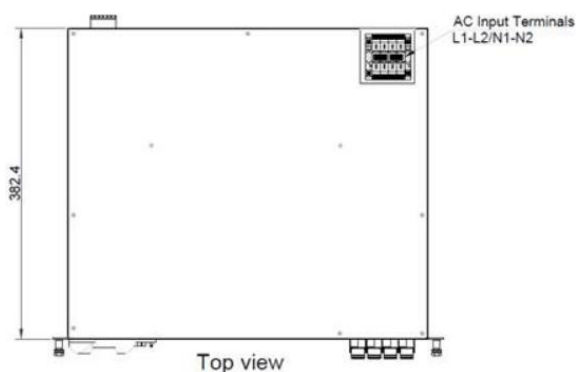

Due to continuous product development, specifications are subject to change without prior notice

07-26/Rev.1.0